

WRSTD

RIBBON SPECIFICATION SHEET WAX/RESIN

THERMAL TRANSFER RIBBON

WR STD is a standard wax/resin ribbon, designed to work on a wide range of printers and label stocks.

RIBBON PROPERTIES

INK TYPE	WAX/RESIN
RIBBON THICKNESS	7.5±0.3µm
BASE FILM	POLYESTER (4.5±0.3µm)
COLOUR	BLACK
TRANSMISSION DENSITY	MORE THAN 1.5 (MACBETH)
PRINT SPEED	UP TO 10"/SEC
INK MELT POINT	80°C
PRINTING ENERGY	13mJ/mm ²

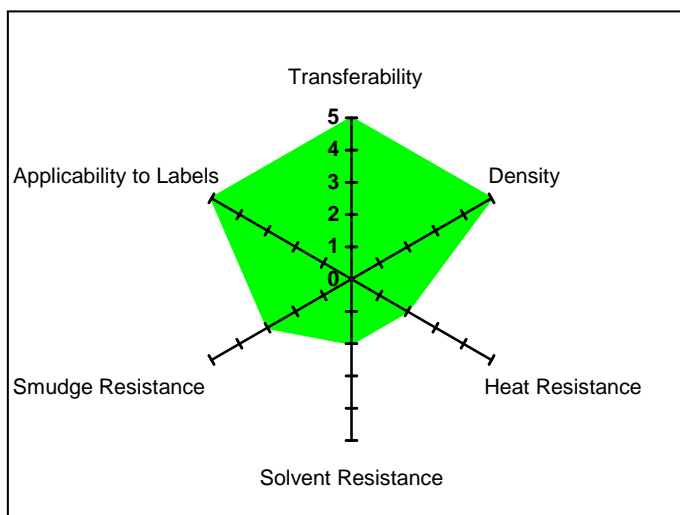


IMAGE PROPERTIES

IMAGE DENSITY	MORE THAN 1.8 (MACBETH)
BARCODE SYMBOL	MORE THAN ANSI 3.5/A (PARALLEL BARCODE)
RECOMMENDED LABEL STOCKS	COATED PAPER, GLOSS PAPER, SYNTHETIC PAPER, PET
SMUDGE RESISTANCE	MORE THAN 90% (MACBETH) * 1
UV RESISTANCE	MORE THAN 80% (MACBETH) * 2
USAGE CONDITIONS	5°C TO 35°C / 20% TO 80% RELATIVE HUMIDITY
STORAGE CONDITIONS	0°C TO 40°C / 20% TO 80% RELATIVE HUMIDITY

*1 RUB TEST
*2 EXPOSURE

PRESSURE : 1.96 X 10⁴ Pa, STROKE CYCLE : 300 CYCLES, CORRUGATED PAPER
168 HOURS ON UV TEST MACHINE, EQUIVALENT TO 3 MONTHS DAYLIGHT EXPOSURE